

AM-1032

Power Mixer amplifier


Made in
France



- Small dimensions
- 30W power
- Easy and quick installation
- Mains/battery power supply

The **AM-1032** is a 30 W mixer amplifier of small size. It is delivered with 2 balanced microphone inputs and 2 unbalanced aux inputs. These inputs can be used in mixed or priority modes.

The casing has been carefully studied for wall-mounting and easy use. The various adjustments are available on the unit sides.

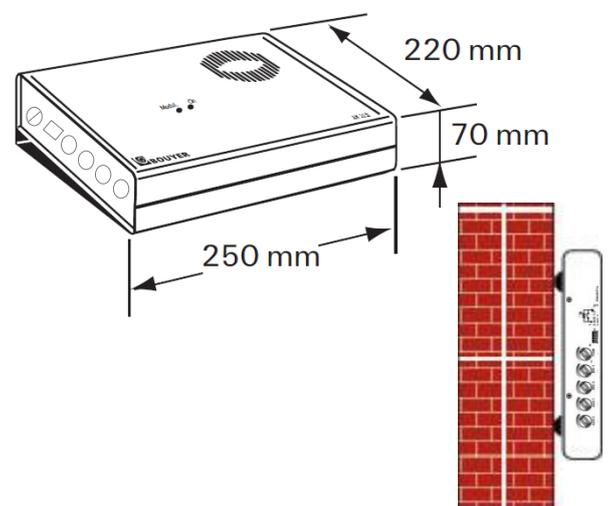

Features

Power	30W	
Frequency band	(-3dB)	60Hz - 20kHz
Distortion		< 1%
S/N ratio		> 75dB
Power supply	230 VAC	90 VA
Battery	24 V	2 A
Dimensions		250 x 220 x 70 mm
Color		Black
Material		Metal
Weight		3,6Kg


Applications

Public Address system..... 

- Shops
- Places of worship
- Multisport rooms




Front view

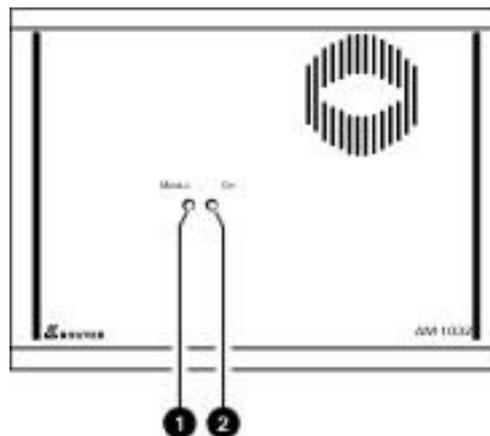

- | | |
|---|------------------|
| 1 | « On » light |
| 2 | Modulation light |

Sides views

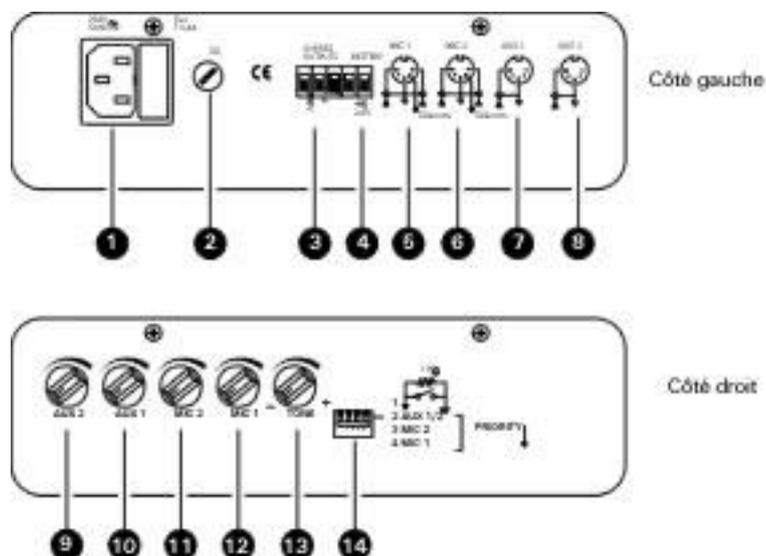

- | | |
|----|---|
| 1 | 230V mains switch with earth and mains fuse |
| 2 | Low voltage fuse |
| 3 | 0-4Ω / 0-100V / 330Ω loudspeaker output |
| 4 | 24V Battery jack |
| 5 | Microphone 1 DIN input |
| 6 | Microphone 2 DIN input |
| 7 | Aux. 1 DIN input |
| 8 | Aux. 2 DIN input |
| 9 | Aux. 2 volume adjustment |
| 10 | Aux. 1 volume adjustment |
| 11 | Microphone 2 volume adjustment |
| 12 | Microphone 1 volume adjustment |
| 13 | Tone correction |
| 14 | Priority management |