

AP-3804

Power Mixer preamplifier


Made in
France



- 8 inputs - 4 outputs
- Priority management
- Independent volume adjustments
- Easy and quick installation

Mixer preamplifier **AP-3804** is provided with 8 balanced inputs configurable on LINE or MIC level. These inputs can be used either mixed or by priority.

The various adjustments are easily made through tone controls and level indicators on front panel. Several preamplifiers can be cascaded, which increases channel quantity.

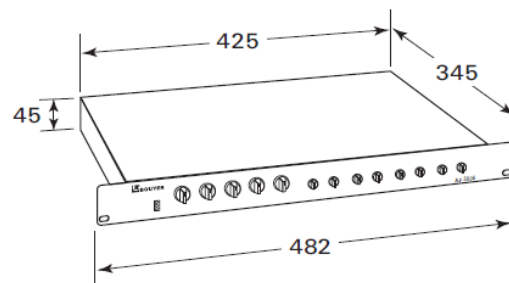

Features

Inputs	4 DIN 4 XLR 2 CINCH
Outputs	0 dBm On terminal
Bandwidth (-3 dB)	20 - 40 000 Hz
Signal/ noise ratio	≥ 80 dB
Power supply	230VAC / 24 VDC
Dimensions (L x l x h)	482 x 345 x 45 mm 1U 19"
Color	Matt black
Material	Metal
Weight	3,4 kg

Applications


Public address.....



- Shops
- Camping places
- Schools, Institutes, Colleges
- Places of worship
- Swimming pools
- Multisports rooms
- Supermarkets
- Town streets




Front view

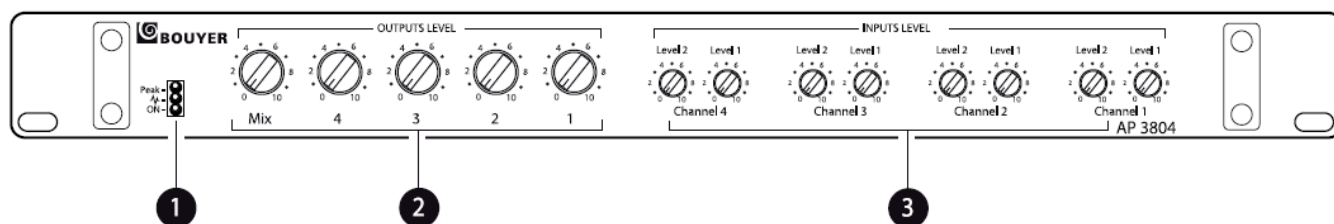

LED indication on mixer bus (vumeter) :

- | | |
|---|--|
| 1 | <ul style="list-style-type: none"> • Alight « ON » green LED : under voltage • Alight « \sim » orange LED : signal • Alight « PEAK » red LED : input nominal level > 0 dB |
| 2 | Output volume adjustment of the 4 channels and mixer output |
| 3 | Input level adjustment |

Rear view

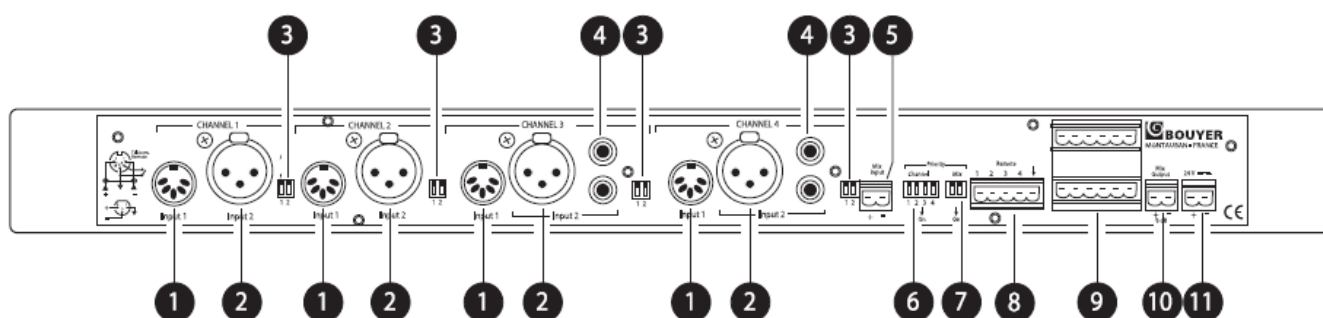

- | | |
|----|---|
| 1 | Four balanced female DIN universal inputs |
| 2 | Four balanced female XLR universal inputs |
| 3 | AUX and MIC selection inverters |
| 4 | Two stereo CINCH terminals |
| 5 | 0 dB unbalanced mixer input terminal |
| 6 | Priority configuration mini switches for each of the 4 channels |
| 7 | « High » priority mini switches |
| 8 | Remote terminal |
| 9 | Balanced output terminals of channels 1, 2, 3 and 4 |
| 10 | 0 dB unbalanced mixer output terminal |
| 11 | Mains or 24V dc battery power supply terminal |