

PR-1406


Power Modular preamplifier

Made in
France



- 6 modular inputs- 4 output
- Functional modules
- Priority management
- Volume / channel adjustment
- Easy and quick installation

The **PR-1406** is a modular mixer preamplifier from 6 inputs towards 4 outputs. Push buttons on front panel make input allocation towards outputs easy. Each input and each output has volume adjustment. It can house the preamplifier modules of BOUYER AZ 12XX series. Its modular design allows great configuration freedom and adaptation also to any configuration.

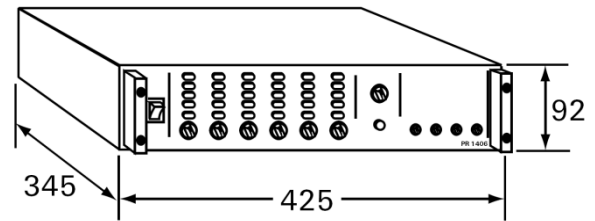

Features

Inputs	6 slots	Modules AZ12XX
Outputs	4 slots	Module AZ1231
Power supply	Mains : 230V	10 VA
	Battery : 24V	0,8A
Dimensions	425 x 325 x 92 mm	2U - 19"
Color		Black
Material		Metal
Weight		6,5Kg

Applications

Public address system.....





- Shops
- Camping places
- Schools, Institutes, Colleges
- Places of worship
- Swimming pools
- Multisport rooms
- Supermarkets
- Town streets

PR-1406


Power Modular preamplifier

Front view

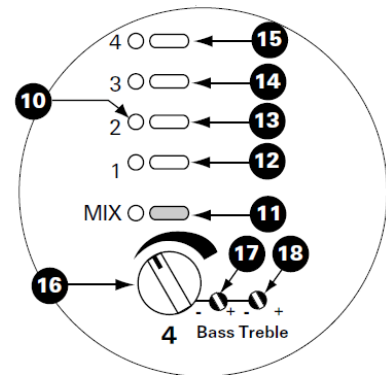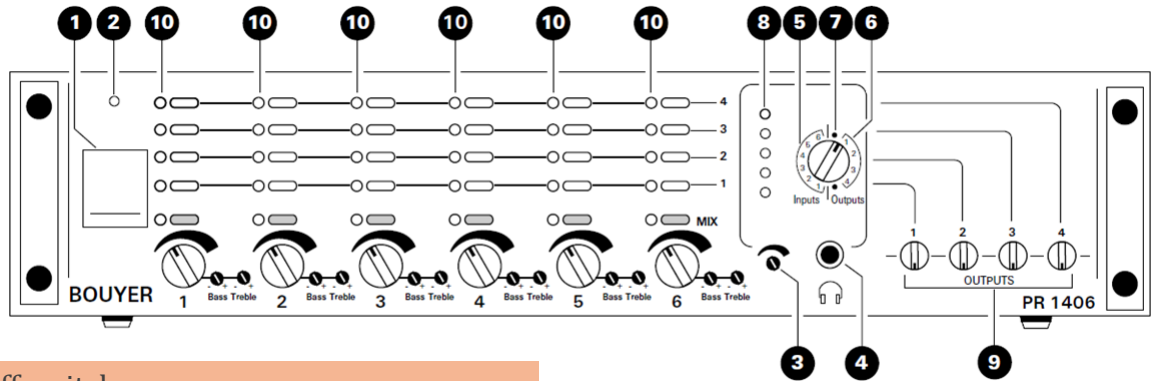

1	On/Off switch
2	Power LED
3	Headset sound level adjustment
4	Headset jack and OdBm output
5	Input selection (numbered from 1 to 6)
6	Output selection (numbered from 1 to 4)
7	Unused positions
8	Sound level vumeter
9	Output sound level adjustment
10	Allocation LEDs to relevant output
11	Mixing button
12 -15	Output allocation button for relevant input
16	Relevant input sound level adjustment
17	Relevant input bass adjustment (through a screwdriver)
18	Relevant input treble adjustment (through a screwdriver)

Rear view

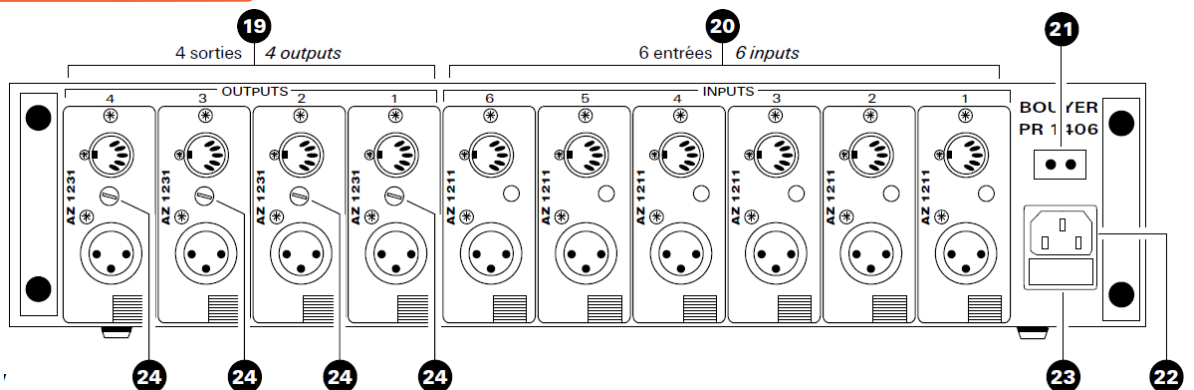

19	Output modules (4 modules max)
20	Input modules (6 modules max)
21	Battery socket
22	230V mains plug with earth
23	Mains fuse : T 100mA (5 x 20)
24	Output level potentiometers from 0 to + 12 dBm

