GX-3016

Sources *Microphone console*




- Up to 16 zones
- Integrated 3-tone chime
- O Power supply over Bus
- Easy and quick installation
- Inconspicuous and multipurpose

The **GX-3016** is a 16 zones paging microphone console. Carefully studied and designed by our engineers, the **GX-3016** works on a bus architecture, ensuring RS485 communication, power

Connection of consoles is therefore made from one console to the other one, without having to go through the central element. Provided with an electret microphone, 16 programmable keys, 4 function keys and 1 chime, this console meets all your needs in Public Address.

supply distribution and share of a same audio channel.

Either put on a table or flush-mounted, this console can be used in several application types.



Features

Keyboard	16-key zone selection	4 function keys
Series connection	Bus	RS 485
Power supply	24 VDC	Cons. : 70 mA max
Dimensions		215 x 175 x 50 mm
Color	Grey console	Black base
Material		Metal
Weight		1Kg

Applications

Speech.....



Checkpoint



Information






GX-3016


Sources *Microphone console*

Top view

- 1 Electret microphone
- 2 Under voltage light
- 3 Busy audio bus light
- 4 « Zone selection » keys + lights
- 5 « Function » keys + lights

Bottom view

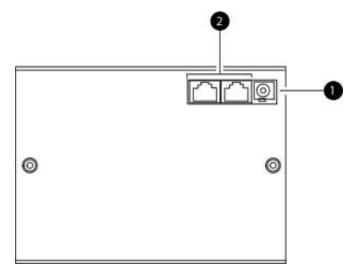



- 1 Remote power supply connector
- 2 RJ 45 IN/ Out connectors for audio/command bus linkage

Bus connection principle



Central equipment Type CC3816

Bus

Câble type CAT5

RJ45-RJ45 right
8 conductors

- 1 audio bus pair 1 pair RS485
- 1 free pair
- 1 24Vdc power supply pair

