



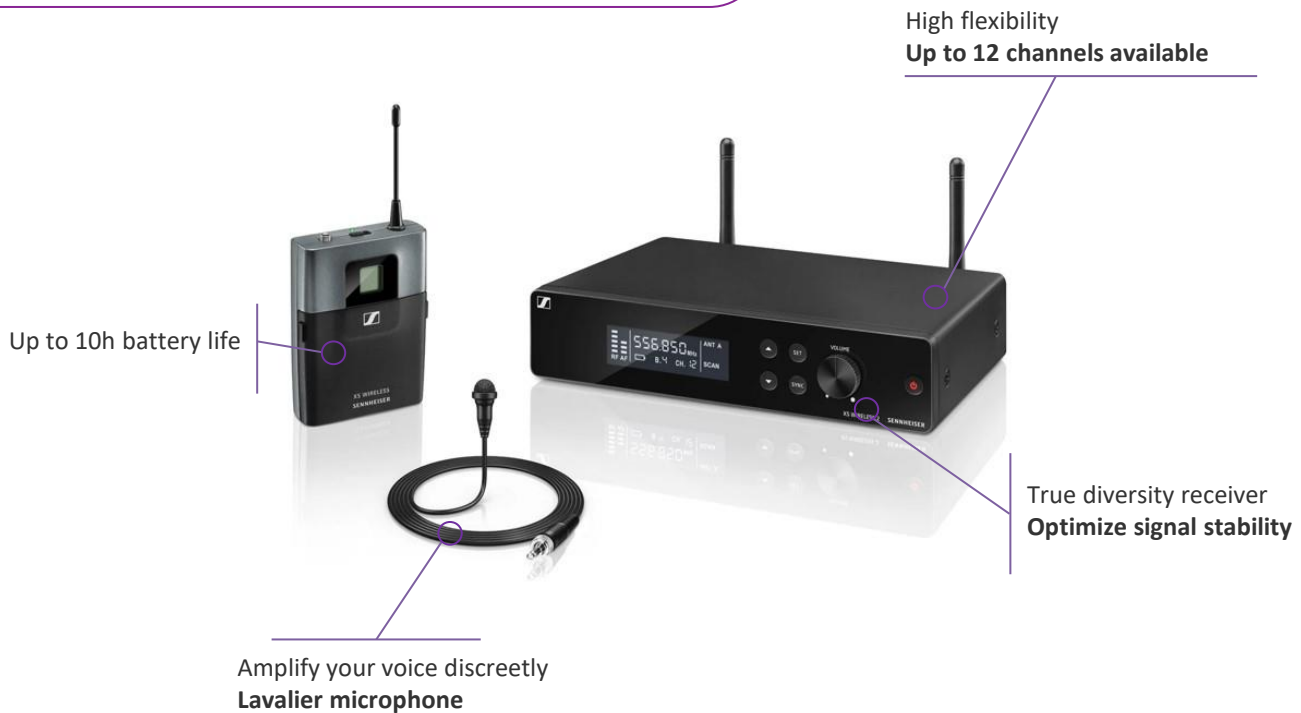


Key points

-  True diversity receiver
-  Excellent audio quality (presenters, singers)
-  High flexibility (12 channels)
-  Rack mounting kit included



More details

HF-CRAV range has 5 models that cover frequency bands from 548 to 865 Mhz to comply with the standards depending on the country (list of models on page 2).

These sets consist of a 12-channel HF receiver with intuitive LCD screen (rack-mountable via supplied accessory) and Lavalier microphone which is plugged on a pocket emitter with 10 hours battery life (supplied with a belt clip).

They guarantee excellent broadcast quality and will adapt to all your needs when amplifying your voice discreetly is essential (animation, speeches, etc.).

SPECIFICATIONS (Emitter)

Mic. type / Directivity	Electrostatic / cardioid
Frequency response	50 – 16 KHz
HF output power	10 mW
Sensitivity	20 mV/Pa (Lavalier mic.) (from 0 to -30dB / steps of 10dB)
Input	Jack 3.5mm
Autonomy	About 10 hours
Power supply	2 AA batteries, 1,5 V
Dimensions (emitter)	71 x 96 x 28 mm
Material	ABS
Color	Grey and black
Weight (emitter)	95 g
Supplied accessories	2 AA batteries and protective pouch

Rear of the receiver



SPECIFICATIONS (Receiver)

Frequency response	50 – 16 KHz (-3 dB)
S/N ratio	≥ 103 dBA
Power supply	Mains (12V DC / 300 mA) Supplied sockets adaptors (EU, US, UK, Korea, Australia, China)
Outputs	Jack 6,35mm (asymmetric) : +6 dB XLR (symmetric) : +12 dB
Dimensions	200 x 42 x 127 mm
Material	Metal
Color	Black
Weight	680 g
Accessories	Mains power supply + rack mounting kit

Model to choose depending on frequencies

Models	Frequencies ranges
HF-CRAV-EU	821 - 832 / 863 - 865 MHz
HF-CRAV-C	766 - 790 MHz
HF-CRAV-B	614 - 638 MHz
HF-CRAV-UK	606 - 630 MHz
HF-CRAV-A	548 - 572 MHz