GXIP-2600

Sources over IP Microphone console over IP




The **GXIP-2600** is a control console for IP network sound system, (see overleaf).


Integrating a **complete IP** network interface (*audio streaming* and *control-driving*), it enables control of several distributed IP matrix units. It is fitted with 5 function keys as general call, or evacuation starting, with 18 zones keys associated to 2 status LEDS, indicating availability and fault status. It is compliant with the EN54 requests. Being provided with an electret microphone and a pre-announcement chime, you can also broadcast spoken messages to the preselected zones over the network.

Thanks to its design and ergonomy, you can integrate it in any environment either put on a table or flushmounted.

Features			Applications
Audio output	IP Streaming	0dBm / bal.	Voice Alarm
Mic.	Electret	Gooseneck- mounted	Public Address
IHM	18 selection keys	5 function keys	Checkpoint
Network connection	100/10 BASE T	RJ 45- CAT5	Meeting point
Power supply	24 VDC	700mA min	Information desk
Dimensions		230x230x70mm	Office
Color		Grey	•
Material		Metal	·
Weight		2,5Kg	

Sources over IP Microphone console over IP



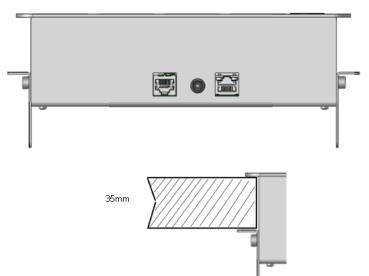

Network distribution architecture

