

# SA-1127

## Power Mixer amplifier

### Key points

- USB / FM / Bluetooth / micro SD embedded player
- 120W amplifier integrated
- 7 inputs – 6 zones – 1 audio stream
- + 1 dedicated input for 6 zones paging console

USB / FM / Bluetooth / micro SD  
Embedded audio player

120W amplifier integrated  
6 lines 100V available



7 audio inputs  
+ 1 dedicated input for 6 zones console

Zones / volume / tone selection  
Parameters available on front facing

### More information

SA-1127 mixer amplifier is a all in one audio system of 120W. It can broadcast one audio stream over 6 lines of speakers ( 100V).

It integrates a 7 inputs preamplifier (+1 dedicated input for PGM-1247-V2 paging console which allows to call over the 6 zones independently) and also a USB / FM / micro SD / Bluetooth embedded player.

The selection of 1 to 6 zones is managed on the front of the product with all necessary parameters to guarantee an easy day to day usage.


It can be installed on a table or in a 19" rack.

### FEATURES

<b>Inputs</b>	3 XLR (mic/line) / 3 RCA / 1 Jack 6.35mm + 1 RJ45 dedicated to PGM-1247 USB port / micro SD slot (front)
<b>Power</b>	120W
<b>Outputs</b>	1 RCA Speakers lines: 100V / 70V / 16Ω / 8Ω / 4Ω (See details on product rear, page 2)
<b>Bandwidth</b>	100– 16Khz
<b>Distortion</b>	< 0,5%
<b>Power supply</b>	Mains : 110 – 265 VAC Battery : 24V DC
<b>Dimensions</b>	2U : 483 x 405 x 88mm
<b>Material</b>	Metal
<b>Color</b>	Black
<b>Weight</b>	9,5 Kg
<b>Accessories</b>	Power cable / FM antenna / infrared remote



### Front

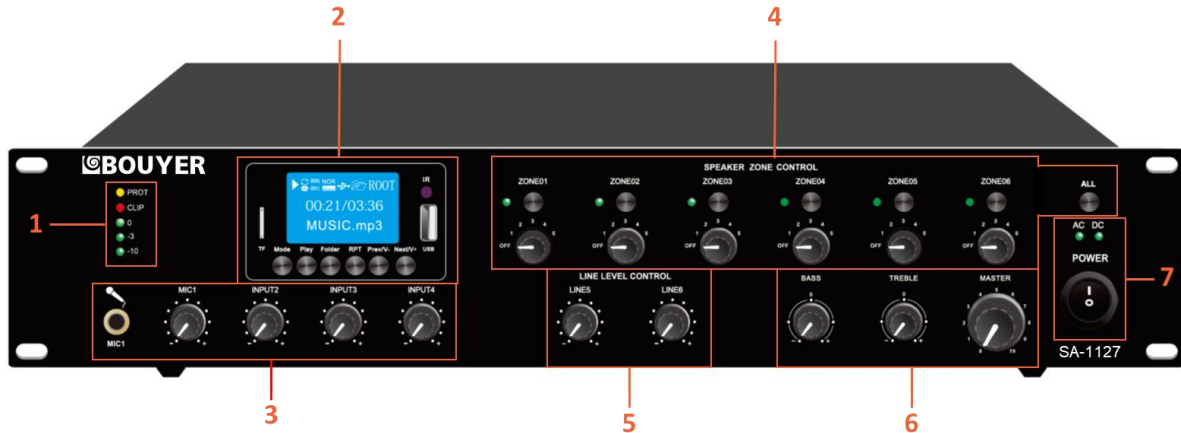

1	Status LED : protection (PROT) / output clipping (CLIP) / other green LED = modulation level
2	USB / FM / micro SD / Bluetooth embedded player with avec backlit display
3	Jack 6.35mm input "MIC1" + volume settings for inputs "MIC1" / "INPUT2" / "INPUT3" / "INPUT4"
4	Management of the 6 available zones with below actions for each zone: - a zone selection button (top) and a volume control switch (bottom) - A green LED indicating whether the zone concerned is activated or not The "ALL" button allows you to directly select all 6 zones
5	Volume settings for inputs "LINE5" / "LINE6"
6	General tone settings : BASS / TREBLE General volume setting "MASTER"
7	ON / OFF switch + AC or DC power LED status

### Rear



1	Mains socket + fuse slot and 24V input for battery
2	1 line output to choose between 100V / 70V / 16Ω / 8Ω / 4Ω speakers' lines (120W max.) <b>Note:</b> if this output is used, the 6 outputs in 100V (3) should not be used.
3	6 lines outputs (100V) for up to 6 speakers' lines <b>Note:</b> if these outputs are used, the 100V / 70V / 16Ω / 8Ω / 4Ω outputs (2) should not be used.
4	Socket for FM antenna Switch to adjust the attenuation in case of broadcast on the "MIC1" input on the front panel
5	3 female XLR inputs with mic/line level adjustment switch + phantom power management (ON / OFF)
6	RCA female outputs "LINE5" / "LINE6" / "EMC" and output "OUT" "EMC" input has the highest priority in the system (EVAC)
7	RJ45 female input dedicated to PGM-1247-V2 paging console