

AM-2015-PACK


Power

Wall mixer amplifier

Key points


- 🌀 All in one bundle : wall amplifier + 6W speakers
- 🌀 USB / FM / Bluetooth / micro SD reader / AUX. input
- 🌀 2 x 15 W built-in amplifier
- 🌀 Multifunction Remote

USB / FM / BT / micro SD / AUX.
Multi-sources player

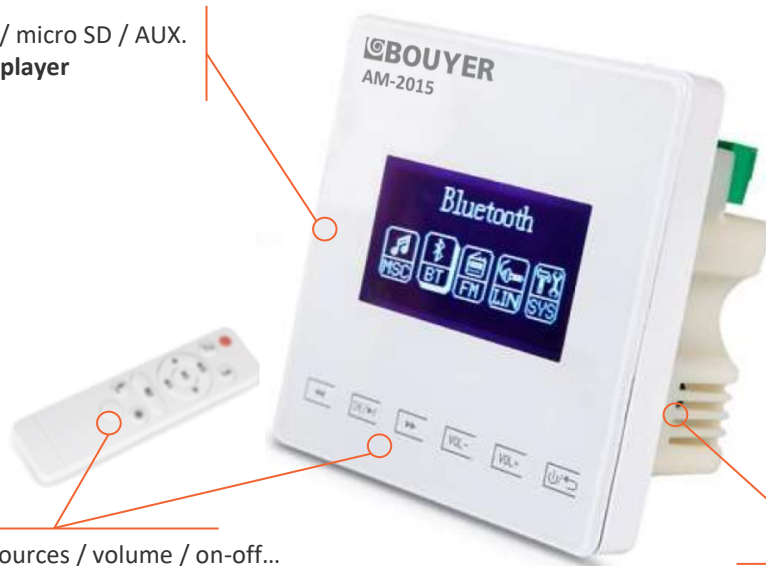

Control sources / volume / on-off...
Controls on front panel and also on remote

2 x ceiling speakers
Power 6W max.

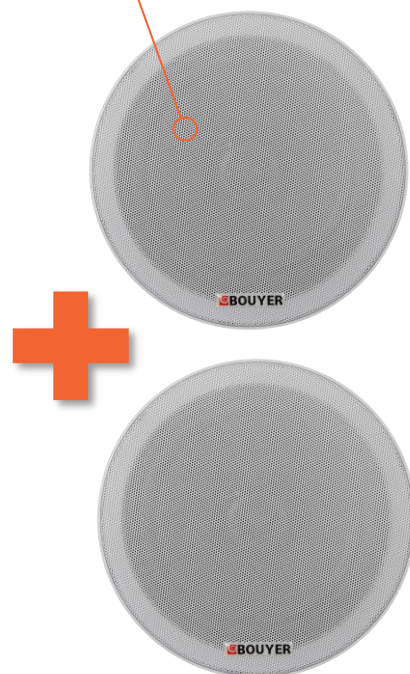

Compact size : 8,6 x 8,6 x 3 cm
+ Drywall installation box supplied

More details

AM-2015-PACK is an all-in-one bundle including a compact wall amplifier (close to the size of a wall outlet) with a 2.2" monochrome screen and 2 x 6W speakers allowing you to easily add sound to a room of up to 100m2.

The wall amplifier integrates a USB / FM / micro SD / Bluetooth player and an AUX input. It has an audio output to broadcast on other audio devices.

It also has 2 dry contacts to remotely activate a chime or start / stop the broadcast in progress.


The supplied remote control allows easy remote control (source selection / play - pause / mute / volume management / previous - next / on - off).

SPECIFICATION

Built-in audio sources	USB / micro SD / tuner FM / Bluetooth
Power	2 x 15 W (8 Ohms) / 2 points terminal block
Other inputs	Aux. via 2 points terminal block Chime activation and remote play/pause via dry contacts (2 points terminal block)
Bandwidth	Amp: 20 – 20kHz / Speakers : 100 – 15kHz
Speakers	SPL: 94 dB (1W / 1m) / Impedance: 8 Ohms
Amp. distortion	< 0,5%
Power supply	110 – 265 VAC (2 points terminal block)
Dimensions	With wallbox: 8,6 x 8,6 x 5,7 cm Speakers : 18,8 x 7,6 cm (cutout Ø 16,5 cm)
Color	White
Weight	Amplifier: 130g Speaker : 600g
Accessories	Drywall wallbox with screws + remote (without AAA - LR03 batteries)




Front

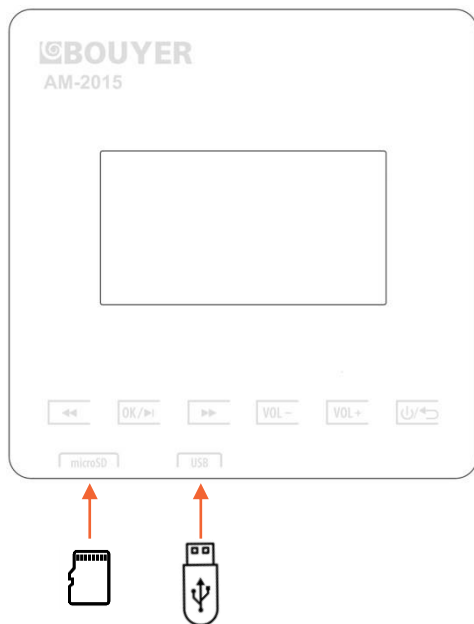

	Back / Main menu navigation
	Access to the different menus / Play - Pause
	Next / Navigation in the main menu
	Lower volume
	Increase volume
	Back / on - off

Top rear

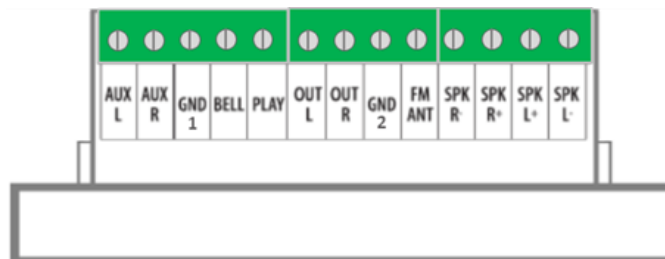

"AUX" input	Stereo AUX input ("AUX L" = Left / "AUX R" = Right) at line level for external source.
GPI "BELL"	Impulse type dry contact to activate a chime when it is closed. Ex: activate chime if the door is opened.
GPI "PLAY"	Impulse type dry contact allowing the broadcast to be paused when it is closed. Ex: stop broadcast if evacuation is triggered.
"OUT" output	Line level stereo output ("OUT L" = Left / "OUT R" = Right).
"FM" radio	Input for FM antenna if reception quality is poor.
"SPK" Speakers output	Loudspeaker outputs 8 Ohms. Output 1 = "SPK R +" to terminal "+" and "SPK R-" to terminal "-" or "COM" from speaker. Same for output 2 with "SPK L +" and "SPK L-" second speaker. Possibility of connecting 2 loudspeakers of 8 Ohms in serial on each output so 4 in total.
Power supply	Mains supply via 3-point terminal block at the top right, at the rear of the product. " L " = LIVE / 'GND' ' = GROUND / ' 'N' ' = NEUTRAL.