

AS-4156

Power Mixer amplifier

Made in
France



- Power : 150W
- 6 switchable inputs
- 2-tone chime
- Power extension
- Easy and quick installation

Mixer amplifier **AS-4156** is provided with 150W power and a class D amplifier, offering high efficiency > 92%.

It has 6 switchable inputs, a MUTE command and a OdBu output for an additional amplifier, which allows to increase power of the system.

This mixer amplifier meets numerous sound configurations.



Features

Inputs	4 MIC / Line 1 digital console 1 music line
Power	150W
Bandwidth	100 - 19 000 Hz
Distortion	< 0,5 %
S/N ratio	> 80 dB
Power supply	110 - 265 VAC
Dimensions	483 x 328 x 132 mm
Colour	Black
Material	Metal
Weight	3,9 kg

Applications


Public Address system.....



- Shops
- Camping sites
- Education buildings
- Places of worship
- Swimming pools
- Multisports rooms
- Supermarkets
- Urban streets




Front view

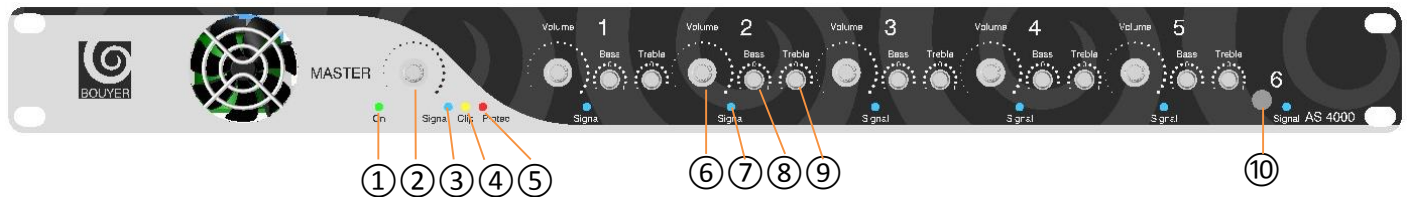

1	Power-on indicator
2	Master adjustment
3	Signal indicator
4	Clip indicator
5	Protec indicator
6	Volume adjustment
7	Signal indicator
8	Bass adjustment
9	Treble adjustment
10	Input 6 on Jack 3,5 mm

Rear view

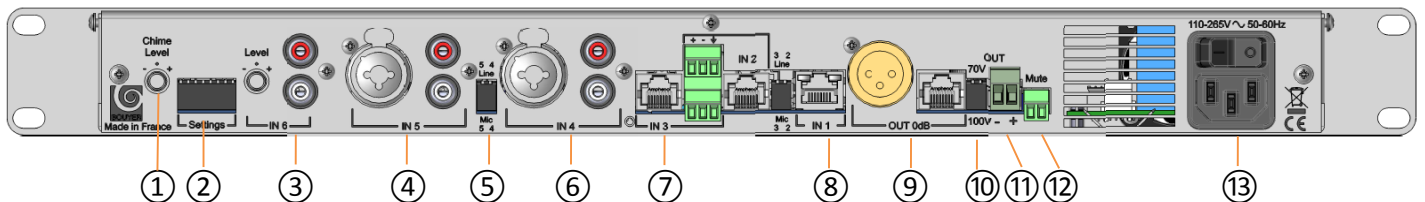

1	Chime level adjustment
2	Configuration 1-2 : priority mode 3 : chime selection 4 : chime selection 5 : detection step 6-7 : release time
3	Input 6 (RCA + adjustment)
4	Input 5 (combo XLR/jack 6,35mm)
5	Mic/Line selection for inputs 4 and 5 1 : input 4 2 : input 5
6	Input 4 (combo XLR/jack 6,35mm)
7	Inputs 2 and 3 (RJ45 + terminal 3 pts) + Mic/Line selection 1 : input 2 2 : input 3
8	Input 1 (RJ45)
9	Output 0dBu (XLR + RJ45)
10	70V/100V selection 1-2 : 70V/100V
11	100V output
12	Mute input
13	Mains socket + start switch