




- 🌀 10-step attenuator
- 🌀 Flush mounting (*plasterboard casing*)
- 🌀 3 available powers
- 🌀 Level restoration relay
- 🌀 Easy and quick installation

Attenuators **RX-ZR0X** allow local sound level adjustment of a 100V line section . Attenuation is made through 10 steps from -3dB to -33dB.

They are equipped with a level restoration relay for emergency messages.

Their white color and sleek design allow inconspicuous integration in all types of environments.

They can be surface or flush mounted.

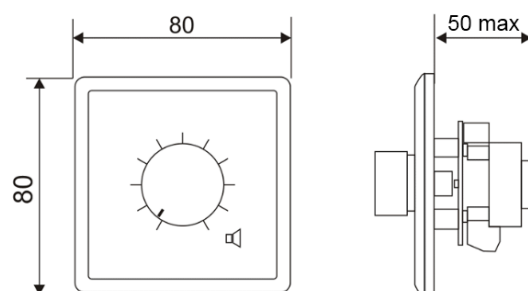

Features

Powers	RX-ZR01-02-03	12-24-50W
Frequency band		50-20KHz
Attenuation	3dB per step	33dB total
Relay consumption	24 VDC	30mA
Dimensions		80 x 48 x 80 mm
Color		White
Material		ABS
Weight		0,2-0,4Kg

Applications

P.A. sound systems.....



- ▶ Meeting places
- ▶ Bar rooms
- ▶ Shops
- ▶ Restaurants
- ▶ Waiting rooms
- ▶ Hotels