




EN 54 - 24 Certified




The **VOICE15T-EN5424** is a horn speaker.

Its high performances enables it to be used in very noisy places. It ensures perfect speech reproduction and excellent sound distribution.

Made out of ABS, it is weatherproof, shock and corrosion resistant. Its fixing device facilitates its orientation and ensures easy and quick installation.

-  **Noisy areas**
-  **Vocal reproduction**
-  **Protection index IP 66**

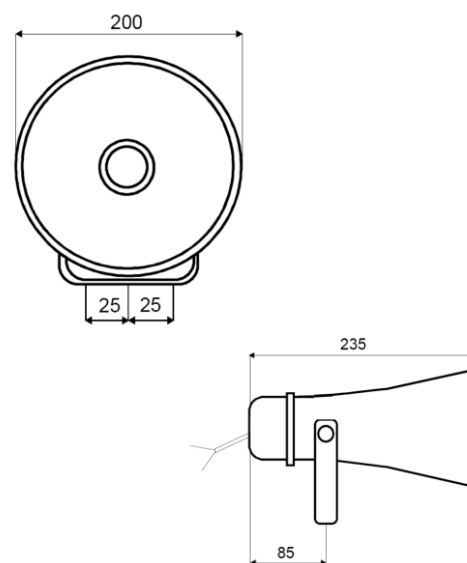

Features






Loudspeaker	Single block	
Powers	15W nominal	15 / 7,5 / 3,75W
Frequency band		320 Hz – 8 kHz
Sensitivity	1W / 1m (2kHz)	110 dB
	15W / 1m (2kHz)	121,8 dB
EN54-24	Pink noise 1W/4m	85,7 dB
	Max 15W/4m	103,8 dB
-6dB Openings	500Hz	180°
	4kHz	20°
Dimensions		200 x 235 mm
Color	Similar to RAL9010	White
Material		ABS
Weight		2Kg

Applications

Voice Alarm system..... 

Music..... 

Speech..... 

-  **Noisy places**
-  **Workshops**
-  **Large distances Outdoors**
-  **Industries**
-  **Town streets**

NB : According to the norm, the use of VA—casing is necessary

