


#### Key points

- True diversity receiver
- Excellent audio quality (presenters, singers)
- High flexibility (12 channels)
- Rack mounting kit included

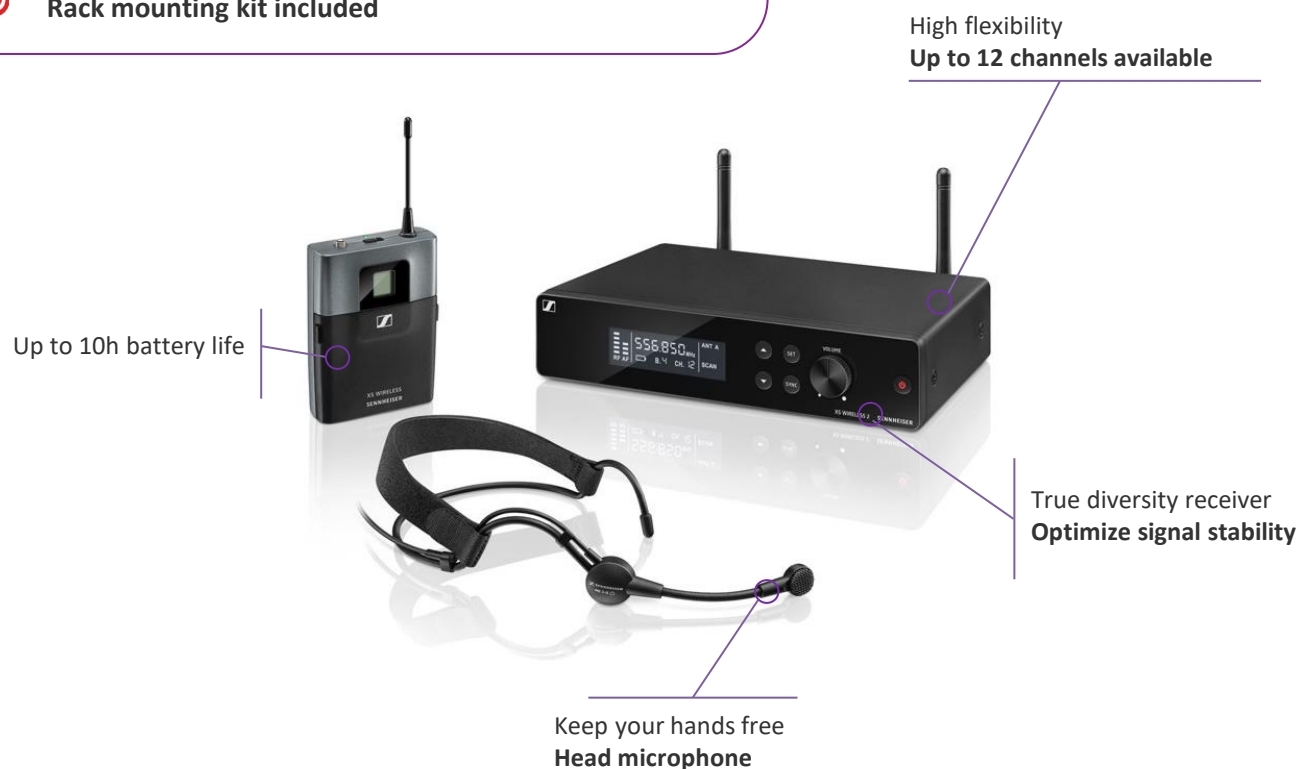

#### More details

HF-TETE range has 5 models that cover frequency bands from 548 to 865 Mhz to comply with the standards depending on the country (list of models on page 2).

These sets consist of a 12-channel HF receiver with intuitive LCD screen (rack-mountable via supplied accessory) and head microphone which is plugged on a pocket emitter with 10 hours battery life (supplied with a belt clip).

They guarantee excellent broadcast quality and will adapt to all your needs when keeping your hands free is essential (animation, speeches, songs, etc.).

#### SPECIFICATIONS (Emitter)

<b>Mic. type / Directivity</b>	Electrostatic / cardioid
<b>Frequency response</b>	50 – 16 KHz
<b>HF output power</b>	10 mW
<b>Sensitivity</b>	1.6 mV/Pa (head mic.) (from 0 to -30dB / steps of 10dB)
<b>Input</b>	Jack 3.5mm
<b>Autonomy</b>	About 10 hours
<b>Power supply</b>	2 AA batteries, 1,5 V
<b>Dimensions (emitter)</b>	71 x 96 x 28 mm
<b>Material</b>	ABS
<b>Color</b>	Grey and black
<b>Weight (emitter)</b>	95 g
<b>Supplied accessories</b>	2 AA batteries and protective pouch

#### Rear of the receiver



#### SPECIFICATIONS (Receiver)

<b>Frequency response</b>	50 – 16 KHz (-3 dB)
<b>S/N ratio</b>	≥ 103 dBA
<b>Power supply</b>	Mains (12V DC / 300 mA) Supplied sockets adaptors (EU, US, UK, Korea, Australia, China)
<b>Outputs</b>	Jack 6,35mm (asymmetric) : +6 dB XLR (symmetric) : +12 dB
<b>Dimensions</b>	200 x 42 x 127 mm
<b>Material</b>	Metal
<b>Color</b>	Black
<b>Weight</b>	680 g
<b>Accessories</b>	Mains power supply + rack mounting kit

#### Model to choose depending on frequencies

Models	Frequencies ranges
HF-TETE-EU	821 - 832 / 863 - 865 MHz
HF-TETE-C	766 - 790 MHz
HF-TETE-B	614 - 638 MHz
HF-TETE-UK	606 - 630 MHz
HF-TETE-A	548 - 572 MHz