


# PGM-1247

## Microphones Microphone console

### Key points

- 6 zones paging console
- AUX input to broadcast pre-recorded messages
- Integrated chime before calls
- 6 consoles max. plugged in bus (RJ45)
- Dedicated to SA-1127 / SA-1247 mixer amplifier

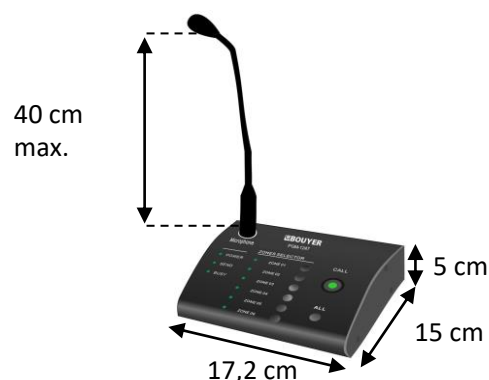

Flexible, 40cm max.  
Gooseneck with luminous ring

RJ45 outputs  
Up to 6 consoles plugged in bus (300m max.)

Jack 3.5mm AUX input  
Pre-recorded messages broadcasts – external device

1 to 6 zones selection with indication of occupied zones  
Management of 6 zones independently

### More information

This paging console is dedicated to voice announcements management on the SA-1127 / SA-1247 mixer amplifier. It allows broadcasting in the 6 available zones with an introduction chime before each announcements.

Thanks to its RJ45 connector, it is easy to connect and it is possible to plug up to 6 consoles in bus on a single amplifier (300m maximum distance between the 1<sup>st</sup> and the last console).

An AUX input (3.5mm jack) is available on the rear panel to connect an external device in order to broadcast pre-recorded messages. The microphone volume is also adjustable on the rear panel.

### FEATURES

Directivity	Cardioid
Impedance	600Ω
Flexible	40cm / XLR female (with red luminous ring)
Connectors	2 x RJ45 (category 6 necessary) (6 consoles max. in bus => 300m max.)
Power	24V phantom on SA-1127 / SA-1247
Dimensions (base)	17,2 x 15 x 5cm
Color	Black
Material	Metal
Weight	900g
Others	Jack 3.5mm AUX input (350mV / 10kΩ)



Rear

