


PGM-1247-V2

Microphones Microphone console

Key points

- 6 zones paging console
- AUX input to broadcast pre-recorded messages
- Integrated chime before calls
- 10 consoles max. plugged in bus (RJ45)
- Dedicated to SA-1127 mixer amplifier

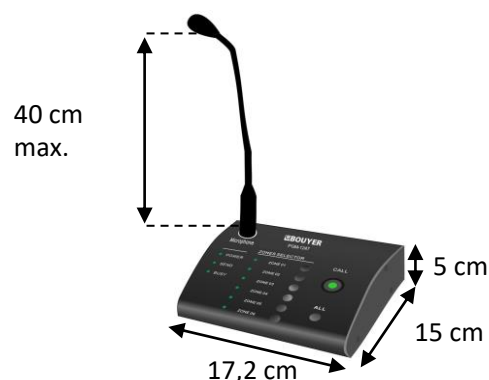

Flexible, 40cm max.
Gooseneck with luminous ring

RJ45 outputs
Up to 10 consoles plugged in bus (300m max.)

Jack 3.5mm AUX input
Pre-recorded messages broadcasts – external device

1 to 6 zones selection with indication of occupied zones
Management of 6 zones independently

More information

This paging console is dedicated to voice announcements management on the SA-1127 mixer amplifier. It allows broadcasting in the 6 available zones with an introduction chime before each announcements.

Thanks to its RJ45 connector, it is easy to connect and it is possible to plug up to 10 consoles in bus on a single amplifier (300m maximum distance between the 1st and the last console).

An AUX input (3.5mm jack) is available on the rear panel to connect an external device in order to broadcast pre-recorded messages. The microphone volume is also adjustable on the rear panel.

FEATURES

Directivity	Cardioid
Impedance	600Ω
Flexible	40cm / XLR female (with red luminous ring)
Connectors	2 x RJ45 (category 6 necessary) (10 consoles max. in bus => 300m max.)
Power	24V phantom on SA-1127
Dimensions (base)	17,2 x 15 x 5cm
Color	Black
Material	Metal
Weight	900g
Others	Jack 3.5mm AUX input (350mV / 10kΩ)



Rear

