

GM-922-B3S


Voice Alarm System Safety microphone

Key points

- 🌀 Dedicated to B3S system
- 🌀 Electret microphone
- 🌀 Angled XLR connector

Cardioid microphone
Intelligibility and quality

Semi-rigid gooseneck
Flexibility

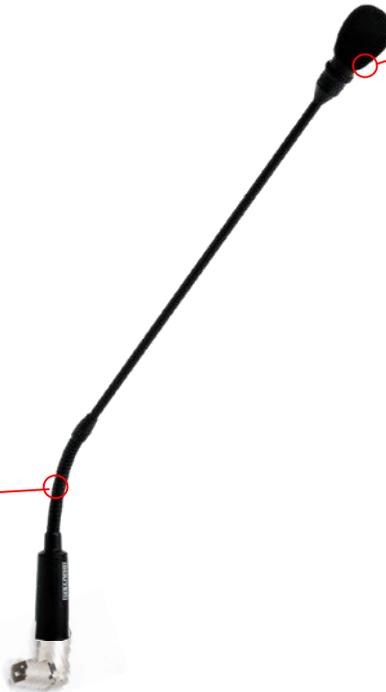

More information

Gooseneck microphone **GM-922-B3S** is an electret cardioid microphone. Its flexible construction and its angled XLR connector allows to store it in a rack system that must be kept closed. It is designed to be used with our safety sound system B3S.

FEATURES

Safety microphone	Cardioid
Impedance	600Ω
Bandwidth	80 Hz – 18 000 Hz
Sensitivity	- 66 dB / Pa
Connection	Angled male XLR
Dimensions	Ø15 x 360 mm
Color	Black
Material	Metal
Weight	0,160 Kg

