

MHE50T-EN5424

Sound diffusers - VA Sound projector

Key features

- High efficiency
- Controlled directionality
- Weather, shock and corrosion resistant
- Ideal for harsh environments
- Adjustable wall mounting




EN 54 - 24 Certified



Weatherproof and shockproof
IP66 protection

Easy to install
Adjustable fork

EN 54 - 24

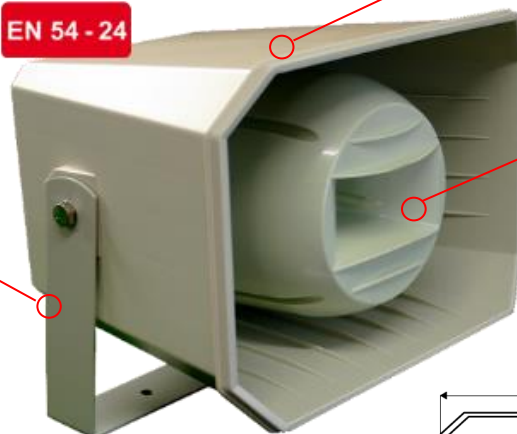

High efficiency
121 dB max.

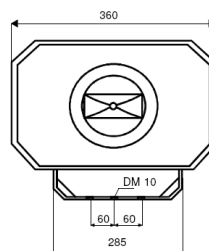

More details

This exponential sound projector (50W) is certified EN54-24. It guarantees a broadcast that combines the acoustic performances of a sound projector and a horn speaker. It allows high quality broadcast of both evacuation messages and background music, with a long range. Made of ABS, it is weatherproof, shockproof and corrosion resistant. Its fixing system facilitates its orientation and guarantees a simple and fast installation.

SPECIFICATION

Power line 100V	50 W nominal 50 / 30 / 15 W
Range	90 – 16 000 Hz
SPL	105 dB / 1 W / 1 m 121 dB / 50 W / 1m
EN54-24 data	85 dB / 1 W / 4 m 103 dB / 50 W / 4 m
Directivity (-6dB)	500 Hz : 110° 4 kHz : 70°
Protection	IP66 / -25°C to + 70°C
Dimensions	360 x 250 x 320 mm
Colour	White Grey
Material	ABS
Weight	4,4 kg

