


Key points


- 10 steps attenuator
- Flush mounting (plasterboard casing)
- 2 available powers
- Automatic level restoration relay



10 steps attenuator (3dB)
Progressive attenuation

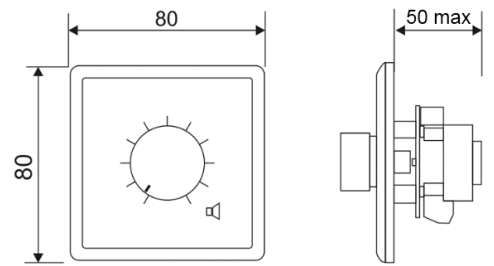

24V relay integrated (safety)
Automatic level restoration

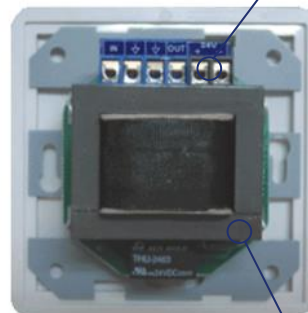

Available in 50W and 200W

More information

Our attenuators range allows local sound level adjustment of a 100V line section, managing up to 200W. Attenuation is made through 10 steps from -3dB to -33dB maximum.

They are equipped with an automatic level restoration relay for emergency messages.

Their white color and sleek design allow easy integration in all types of environments.

They can be surface or flush mounted.

FEATURES

Power	50W (RX-ZR03) / 200W (RX-ZR04)
Line input	100V
Attenuation per step	3 dB
Total attenuation	33 dB
Numbers of positions	10
Consumption	24 VDC – 30 mA
Dimensions	80 x 80 x 48 mm
Material	ABS
Color	White
Weight	517g (RX-ZR03) / 778g (RX-ZR04)
Installation	Surface or flush mounted (flush mounting box not supplied)