


Key points

- Flush mount wired chairman console
- Built-in speaker
- Mechanical keys + OLED screen
- Choice of listening language + voting function

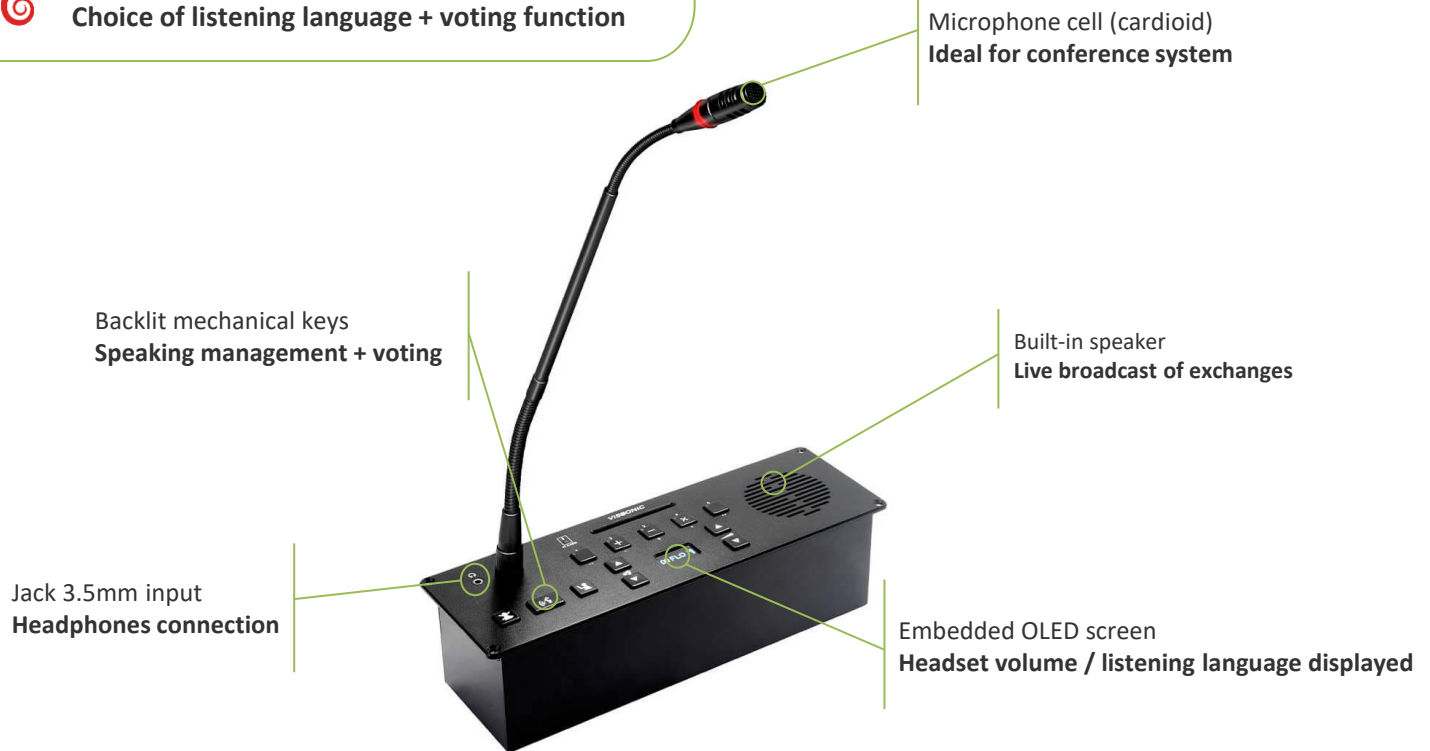

More details

The CONF-PP-DSP-E flush mount console uses a cardioid microphone cell (captures sounds coming from the front) suitable for a conference system.

It allows the chairman to speak and manage who can speak among delegates thanks to the integrated keys (priority key and validation of request to speak key).

It is also possible to choose the listening language (a headset is then recommended) and to take part in votes.

Its OLED screen also displays the volume of the headphones and the listening language selected. It easily connects to the system thanks to its RJ45 input and can be chained with another console thanks to its second RJ45 output port.

FEATURES

Directivity	Cardioid
Bandwidth	20 Hz – 20kHz
Gooseneck	41 cm
Connectors	2 x RJ45 (IN / OUT for console chain) 3.5mm stereo headphone jack
Power	Supplied by CONF-UC-DSP central unit
Base dimension	26,5 x 7,2 x 8,5 cm (L x h x l)
Mounting	24,8 x 7,6 cm (hole for flush mounting)
Color	Black
Material	Aluminum
Weight	1,1 kg (with gooseneck microphone)
Others	2m RJ45 cable supplied