






Key points

-  Central unit 1U / 19"
-  90 wired consoles (up to 5 200 max. with extension)
-  Consoles directly powered in RJ45
-  Conference recording function (mp3 / USB key)
-  2 audio inputs / 8 audio outputs

Management of all parameters
Conference mode / DSP / Network / Interpretation...

Volume management
Management of output volume



Recording function
Record conference on USB key

More details

The CONF-UC-DSP central unit can be used to control a system with wired consoles from the CONF-XX-DSP range.

The central unit is configured on the front panel directly from its integrated screen (conference mode / DSP / voting / network / zones / interpretation, etc.).


It is also possible to record conference exchanges on a USB key in MP3 format using the key on the front panel.

The central unit is easy to install in a 19" rack thanks to its small footprint of 1U.

FEATURES

Consoles capacity	90 consoles max. (5 200 max. via extension modules)
Bandwidth	20 Hz – 20kHz
Distortion	< 0,05%
Input	2 inputs (RCA female / XLR male) 8 outputs (RCA female / XLR male / Euroblock connector)
Power	110 - 265 VAC
Consumption	12W (150W max.)
Dimensions	1U / 19" (483 x 43,6 x 260 mm)
Color	Black
Material	Metal
Weight	3 kg

Rear facing

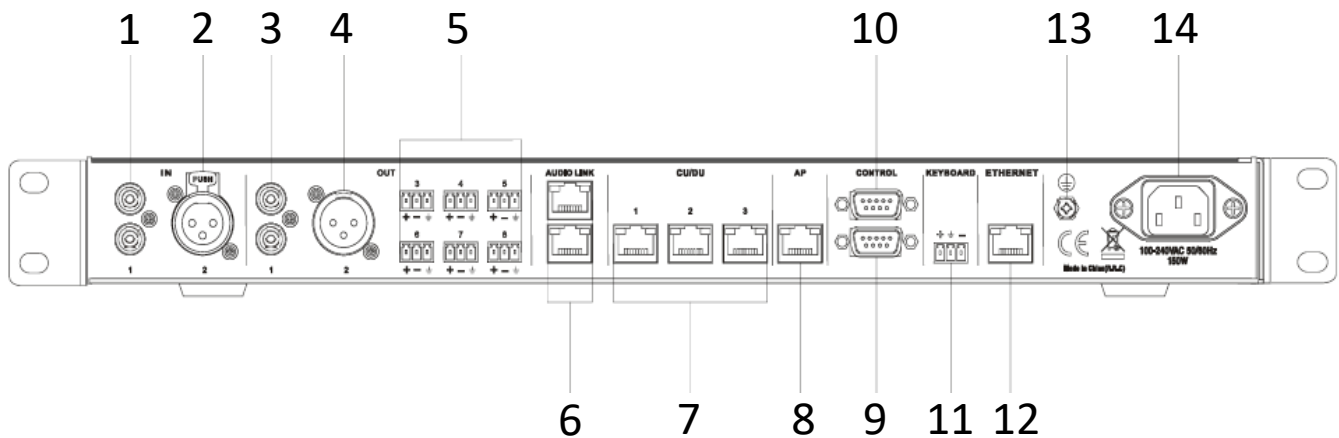

1	RCA female audio input	Same audio input
2	Male XLR audio input	
3	RCA female audio output	Same audio input
4	Male XLR audio output	
5	6 audio outputs / 3-point terminal block type (allows the creation of zones with differentiated volumes or output dedicated to an interpretation language)	
6	RJ45 output towards another main unit	
7	RJ45 outputs for consoles (30 consoles max. by RJ45 port)	
8	Not used - Dedicated to CONF-UC-WIFI central unit	
9		
10	Not used - Dedicated to video tracking function	
11		
12	Not used - Dedicated to software configuration	
13	Connection to ground	
14	Power supply input	