

Key points

- Central unit 1U / 19" for wired system
- Built-in consoles power supply (RJ45 outputs)
- Conference recording function (mp3 / USB key)
- 2 audio inputs / 3 audio outputs (1 stream)

Conference modes management
Open / Speech validation / Voice detection / FIFO

Volume management (0 dB to -20 dB)
Management of output volume



Max. number of active consoles
Limit the number of simultaneous broadcasts

Recording function
Record conference on USB key

More details

The CONF-UC central conference unit can be used to control a system of up to 90 consoles (CONF-PP / CONF-PD).


It is very easy to configure on the front panel by setting the conference mode, the maximum number of consoles that can be active simultaneously and the output volume if necessary. It is also possible to record conference discussions on a USB key in MP3 format using the button on the front panel.

The central unit is easy to install in a 19" rack thanks to its small footprint of 1U.

FEATURES

| | |
|--------------------------|---|
| Consoles capacity | 90 consoles max. (5 200 max. via extension modules) |
| Bandwidth | 20 Hz – 20kHz |
| Distortion | < 0,05% |
| Input | 2 inputs (RCA female / XLR male) 3 outputs (RCA female / XLR male / Euroblock connector) |
| Power | 110 - 265 VAC |
| Consumption | 12W (150W max.) |
| Dimensions | 1U / 19" (483 x 43,6 x 260 mm) |
| Color | Black |
| Material | Metal |
| Weight | 4,6 kg |

Rear facing

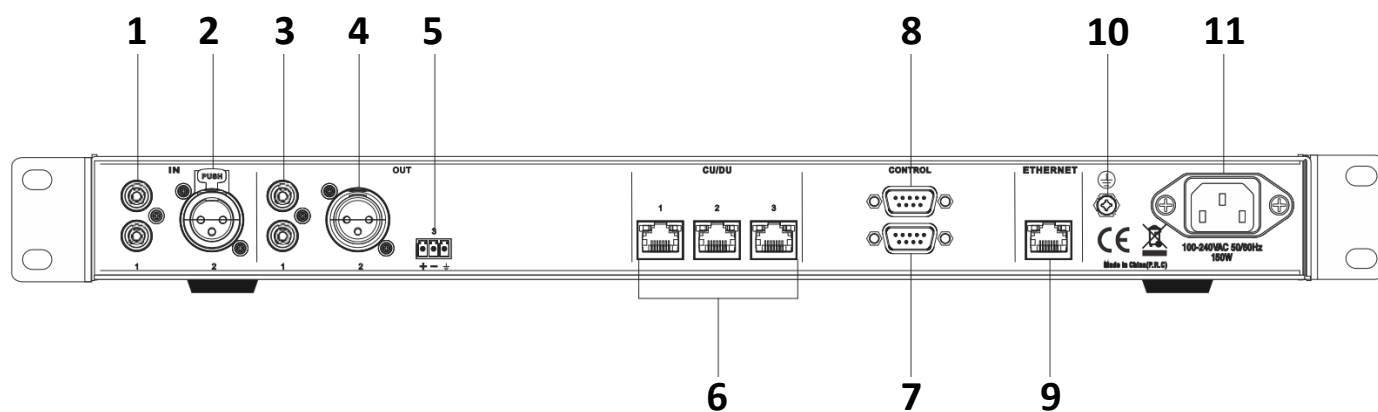

| | | |
|----|---|-------------------|
| 1 | RCA female audio input | Same audio input |
| 2 | Male XLR audio input | |
| 3 | RCA female audio output | Same audio output |
| 4 | Male XLR audio output | |
| 5 | 3 points Euroblock connector output | |
| 6 | RJ45 outputs for consoles (30 consoles max. by RJ45 port) | |
| 7 | Dedicated to video tracking function | |
| 8 | Dedicated to software configuration | |
| 9 | Connection to ground | |
| 11 | Power supply input | |