

Key points

- Weatherproof and durable
- Optimal audio quality
- Multipurpose, compact size
- Easy adjustable power




Weatherproof and durable
IP66 level and aluminum body

Multipurpose
Controlled sound coverage + adjustable orientation

Optimal audio quality
Made of 4 speakers (3") + 1 tweeter

Easy adjustable power
Accessible potentiometer

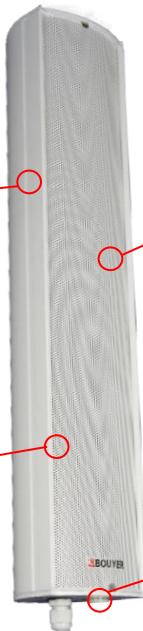

More information

This EN54-24 aluminum column is a 2 way system composed of 4 drivers (3") and one tweeter which guarantees an optimal sound quality for both background music and safety messages. Its metal body and its IP66 level allows it to be installed both indoor and outdoor. Its controlled sound coverage makes it the best fit for the hardest spaces to cover with a sound system.

FEATURES

| | |
|----------------------------|--|
| Nominal power | 40W |
| 100V line power | 40 / 20 / 10 / 5W + 4 Ohms adjustable with potentiometer |
| Bandwidth | 150 Hz – 18 kHz |
| SPL | 89 dB / 1 W / 1 m 104 dB / 40 W / 1m |
| EN54-24 data | 75 dB / 1 W / 4 m 91 dB / 40 W / 4 m |
| Directivity (-6dB / 1 KHz) | 190° (H) x 90° (V) |
| Protection | IP66 / - 25°C to +70°C |
| Dimensions | 47,6 x 8,6 x 9,7 cm |
| Material | Aluminum |
| Colour | White – RAL 9010 |
| Weight | 3.9 Kg |

Support aluminium + vis support colonne fournis

