

IG-1900

Intercom systems Counter intercom

Key points

- 🌀 Ideal counters & ticket offices
- 🌀 Console with embedded mic. & loudspeaker
- 🌀 Robust all-in-one client-side module
- 🌀 Quick and easy installation




Ideal counters & ticket offices
All in one autonomous kit

Smart audio features
Optimal audio quality

Console with embedded loudspeaker
Easy to use

Clients' mic. + speaker module
To stick, integrated 3M sticker

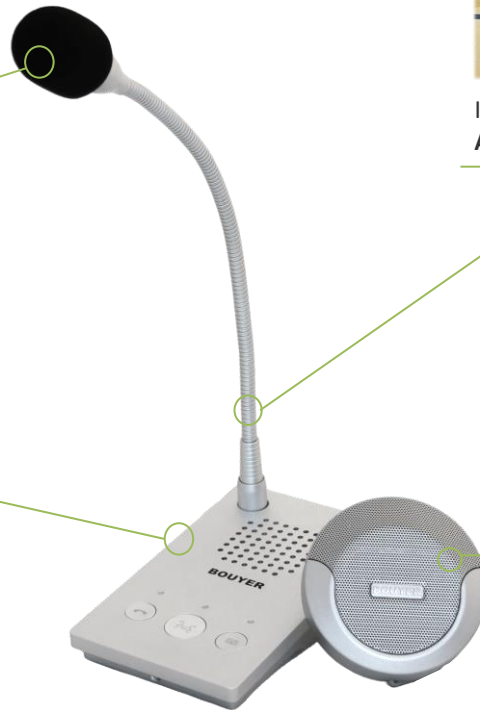

More details

The counter intercom IG-1900 is ideal for closed counters or counters with glass/plexiglass protection. It facilitates the transmission of messages between interlocutors and guarantees intelligible communication in total safety.

It also has intelligent audio functions such as active noise reduction and automatic sound level adjustment to ensure optimal exchange quality.

It consists of a microphone console with integrated loudspeaker on the counter side (receptionist) and an all-in-one module with microphone and integrated loudspeaker on the customer side.

An AUX output also allows you to connect a magnetic induction loop, for example.

CONSOLE SPECIFICATIONS

Microphone type	Condenser - Unidirectional
Sensitivity	- 46 dB
Frequency response	20 Hz - 16 kHz
Embedded speaker	3 W (100Hz - 18kHz)
Power supply	12V --- 1.5A / Conso. ≤ 5W (Mains charger EU type C plug supplied)
Temperature range	-10° / + 50°C
Humidity range	≤ 90% RH
Color	Silver
Material	Steel
Dimensions (l x p x h)	95 x 160 x 46.5mm
Weight	440g



Volume (-)
configuration



Activate/deactivate
communication



Volume (+)
configuration



Client's module specification



SPECIFICATION	
Microphone type	Electret - Unidirectional
Sensitivity	- 46 dB
Frequency response	20 Hz - 16 kHz
Embedded speaker	3W (92 dB @ 1W / 1m)
	100 Hz - 18kHz
Power supply	Powered by main console
Temperature range	-10° / + 50°C
Humidity range	≤ 90% RH
Color	Silver
Material	Aluminum
Dimensions (l x p x h)	87 x 25 x 87mm
Weight	200g

Detailed dimensions

