








-  **Independent messaging**
-  **Activation by remote control**
-  **MP3 audio format**
-  **Independent volume controls**
-  **Small dimensions 2U - 19"**

The **GD 3302** is an MP3 recorder equipped with a preamplifier MIC / AUX with modulation detection and configurable remote controls for triggering messages and music. It offers two options for operating one for the direct reproduction of the player and the other for mixing the player and MIC / AUX with priority management. It also features volume controls of the player and the MIC / AUX input , this is coupled with a music relative gain setting. The GD3302 can be used in all types of public address systems requiring activation of recordings and broadcastings.

Features

Inputs	MIC	AUX
<i>DIN XLR</i>	-52dBu	-10dBu
<i>Jack 6,35</i>	-30dBu	+10dBu
Output		0 dBu
Memory	Flash 128MB	SD card
Power supply	Mains	230 V AC – 15VA
Dimensions		425 x 345 x 92 mm
Color		Black
Material		Metal
Weight		5,3 Kg

Applications


Music.....
Speech

-  **Malls**
-  **Exhibition centres**
-  **Theaters**
-  **Conference rooms**
-  **Sports rooms**
-  **Administrative buildings**

*Accessories provided : mains cord-
Option AZ7 for rack mounting*




Top view

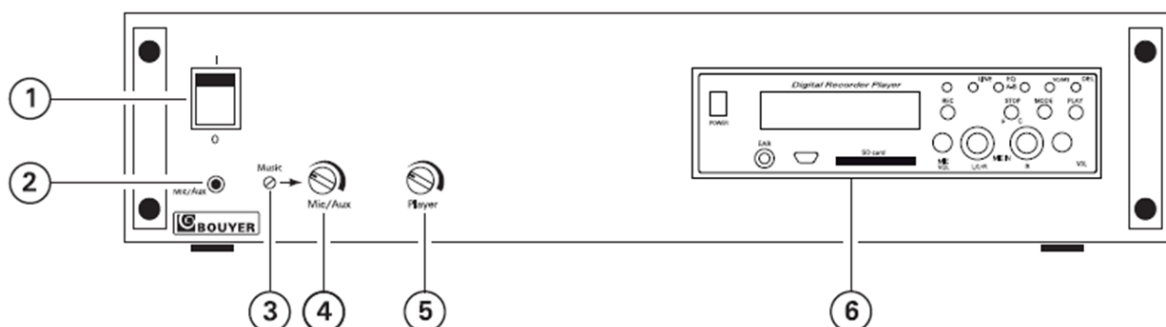

- 1 Power switch
- 2 Preamplifier input jack
- 3 Music attenuation on preamplifier output
- 4 Preamplifier volume adjustment
- 5 MP3 player volume adjustment
- 6 MP3 player

Bottom view

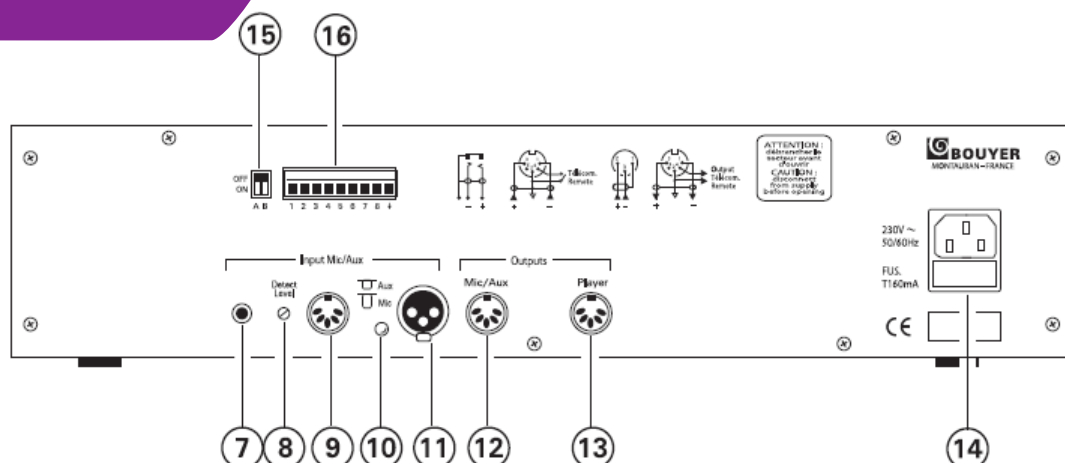

- 7 Preamplifier input jack
- 8 Attenuator on modulation detection
- 9 Preamplifier input DIN socket
- 10 AUX or MIX selection push button
- 11 Preamplifier input XLR
- 12 Mixer output on DIN
- 13 Player direct output on DIN
- 14 230V mains plug with earth and mains fuse
- 15 Configuration for opening or closing contact
- 16 8 remote controls + common point