Sources Pocket transmitter and microphone



The **GM-2810** is a pocket transmitter with headband microphone and lavalier microphone. It has to be used with diversity GZ2802 receiver in frequency modulation band UHF 744 – 764 MHz. The whole unit is provided with its carrying case.


Its small size makes it easy to be concealed. A belt clip ensures its maintaining in any circumstance. This microphone is used in any place demanding great freedom of movement.

Features			Applications	
UHF band	16 frequencies	744-764MHz	Speech	
Frequency band		50 Hz – 18 Khz		
Stability		0,005%		
Self operation		> 10h	Shops (animations)	
Power supply	2 batteries 1,5V LR6 AA	Consumption 100mA / 3V	Theatres / Entertainment	
Dimensions		105 x 68 x 20 mm	Exhibitions / Fairs	
Color		Anthracite grey	Sports rooms	
Material		Plastic	•	
Weight		0,140 Kg	Conferences	



Presentation

1	4-pin XLR mini plug
2	On / Off switch
3	Antenna
4	Operation indicator and low battery
5	Channel selection switch
6	Space for batteries
7	Level adjustment
8	Belt clip

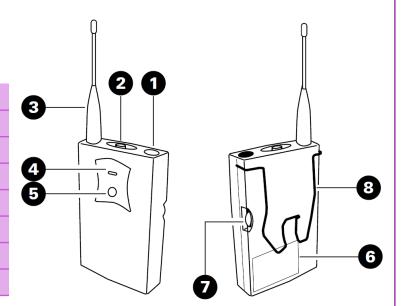







Available frequencies

Channel Frequencies (MHz)		Channel	Frequencies (MHz)
1	744.250	9	754.250
2	745.500	10	755.875
3	746.500	11	757.000
4	747.125	12	758.500
5	748.200	13	759.000
6	749.125	14	760.750
7	750.501	15	761.750
8	753.500	16	763.250

