

Vulca Voice

Voice Alarm System
All-in-one system

EN 54 - 16 Certified

Made in
France



- ② 2 AUX inputs (*music + LIVELY*)
- ① 1 microphone consoles bus
- ① 1 message data base
- ① From 1 to 4 loudspeaker lines
- ④ 400 W max. per box / 300 W max. per line
- ① Integrated UPS

Vulca Voice is a range of compact standalone **EN54-certified** Voice Alarm System, including batteries and charges.

In addition to Voice Alarm functionalities, numerous interfaces allow to meet all types of Public Address applications. SD memory card associated with digital player makes it possible to easily customize your messages and set diffusion as a playlist or individually.

Implementation is simple thanks to small depth dimensions, full integration of equipments and adapted interfaces ; GX3016 consoles can be connected through simple Cat5 cable.

Various Vulca Voice

Reference	Without backup amplifier		With backup amplifier	
	Qty of zones	Total power	Qty of zones	Total power
CSC1-310	1	300 W	NA	NA
CSC1-420	2	400 W	1	300 W + 300 W
CSC1-430	3	400 W	2	400 W + 300 W
CSC1-440	4	400 W	3	400 W + 300 W

Optional IP streaming audio enables to easily interface it with a network control element like a console (*please contact us*)

Applications

Voice Alarm system.....



Public Address system.....




- Administrative buildings
- Middle-schools/ Institutes
- Cinemas
- Industries
- Subway / Tram stations
- Museums
- Theatres
- Supermarkets



Vulca Voice

Voice Alarm System All-in-one system

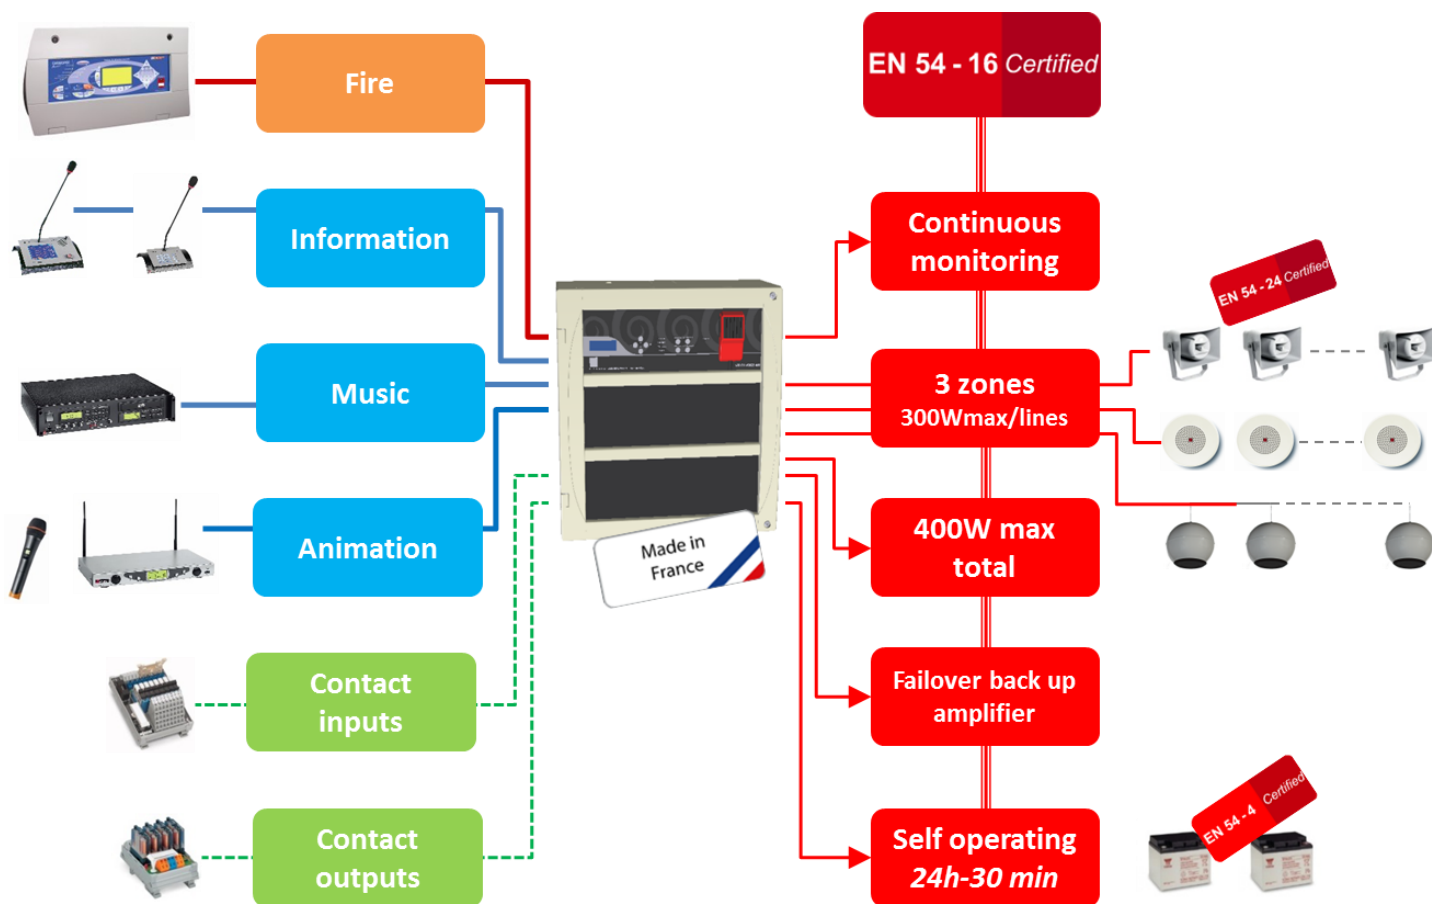

Main features

Inputs	4	MIC/LINE -30dBm / 0dBm
Outputs	1 to 4	100V - 300W max per output
Frequency band	±3dB	50Hz - 20kHz
Distortion		< 1%
THD + N		>70dB
Interfaces	Ethernet IP (Remote maintenance)	USB
Power supply	230V AC / 920VA max	Batteries 2 x 12V - 38Ah
Dimensions		520x530x240mm
Color		Grey
Material		Metal
Weight	With batteries * ~38,5kg	Without batteries * 20,5kg

* Batteries are not included