





# GM-2810

## Sources

*Pocket transmitter and microphone*



-  Hands free
-  16 frequencies
-  Headband/lavalier microphones
-  Carrying case

The **GM-2810** is a pocket transmitter with headband microphone and lavalier microphone. It has to be used with diversity GZ2802 receiver in frequency modulation band UHF 518 – 542 MHz. The whole unit is provided with its carrying case.






Its small size makes it easy to be concealed. A belt clip ensures its maintaining in any circumstance. This microphone is used in any place demanding great freedom of movement .

## Features

UHF band	16 frequencies	518-542MHz
Frequency band		50 Hz – 18 Khz
Stability		0,005%
Self operation		> 10h
Power supply	2 batteries 1,5V LR6 AA	Consumption 100mA / 3V
Dimensions		105 x 68 x 20 mm
Color		Anthracite grey
Material		Plastic
Weight		0,140 Kg

## Applications



Speech.....

-  Shops (animations)
-  Theatres / Entertainment
-  Exhibitions / Fairs
-  Sports rooms
-  Conferences



### Presentation

- 1 4-pin XLR mini plug
- 2 On / Off switch
- 3 Antenna
- 4 Operation indicator and low battery
- 5 Channel selection switch
- 6 Space for batteries
- 7 Level adjustment
- 8 Belt clip

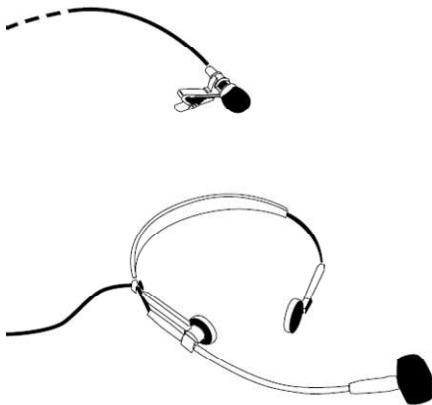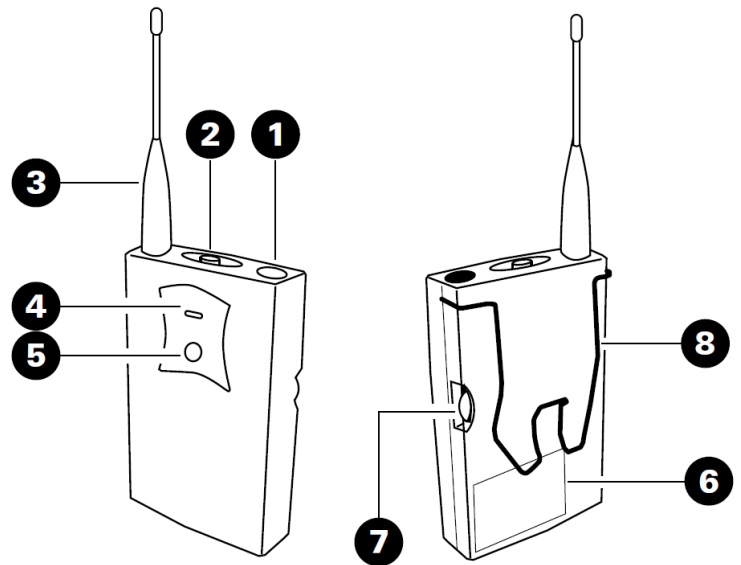

### Available frequencies

CANAL	FREQUENCE (MHz)	CANAL	FREQUENCE (MHz)
1	518.750	9	526.875
2	519.375	10	528.250
3	521.125	11	531.250
4	522.000	12	532.000
5	523.250	13	533.625
6	524.250	14	534.750
7	524.875	15	536.250
8	526.000	16	541.750