






GXT-4000-XX

Sources

Microphone console




-  **Touch interface**
-  **From 16 to 64 programmable keys**
-  **Audio Bus architecture**
-  **Easy and quick installation**
-  **Inconspicuous and multipurpose**

The **GXT-4000-XX** is a touchscreen call microphone console : from 16 to 64 programmable keys. Carefully studied by our engineers, it works on a bus architecture, ensuring RS485 communication, power supply distribution and share of a same audio channel.

Connection of consoles is therefore made from one console to the other one, without having to go through the central element. Provided with an electret microphone, a touchscreen, 1 memory card holder, 1 monitoring loudspeaker, 1 limp button with cap. This console meets all your needs in Public Address.

Either put on a table or flush-mounted, this console can be used in several application types.

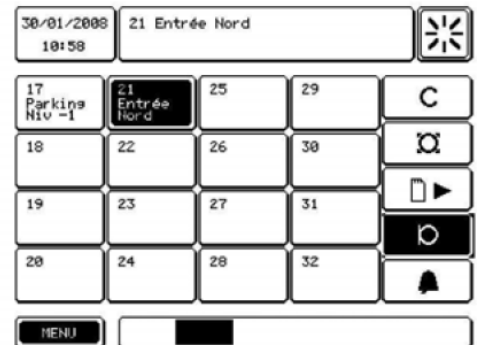





Features

| | | |
|-------------------|--------------|-----------------------|
| Message reader | | SD cards |
| Series connection | Bus | RS 485 |
| Power supply | 24 VDC | Cons. : 110 mA max |
| Dimensions | | 287 x 237 x 73 mm |
| Color | Grey console | Black base |
| Material | | Metal |
| Weight | | 2,5Kg |

Applications


Speech.....

-  **Checkpoints**
-  **Meeting points**
-  **Information**
-  **Offices**




Top view

- 1 Electret microphone
- 2 Touchscreen
- 3 Memory card holder
- 4 « limp » button with cap
- 5 Monitoring loudspeaker
- 6 Stylus holder

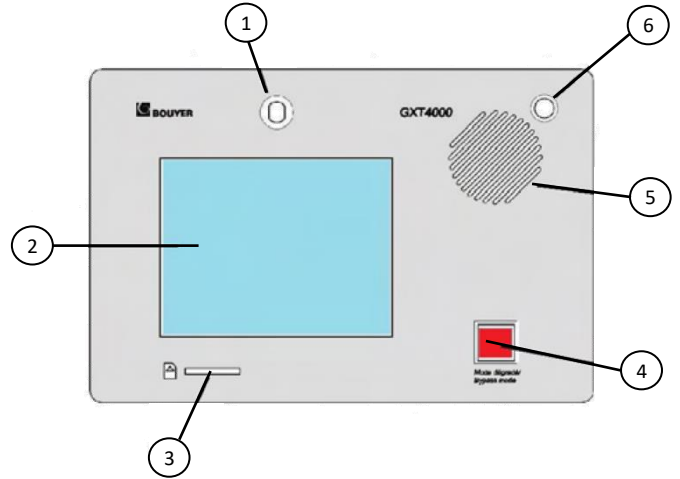

Bottom view

- 1 Grommet for button with cap connector
- 2 Ground lug
- 3 RJ 45 In / Out plugs

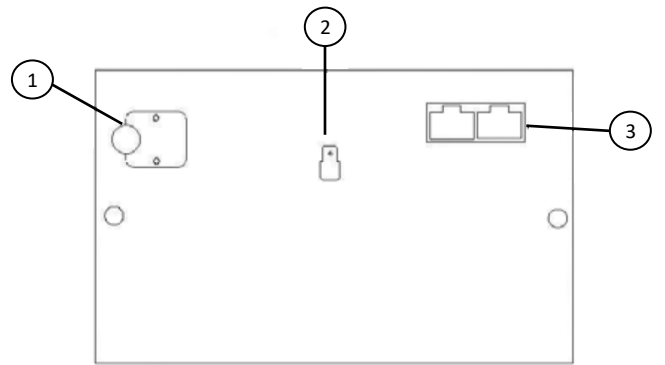


Side view

- 1 24V power supply jack plug
- 2 Sub D9 (RS 232) plug for soft downloading



Bus connection principle

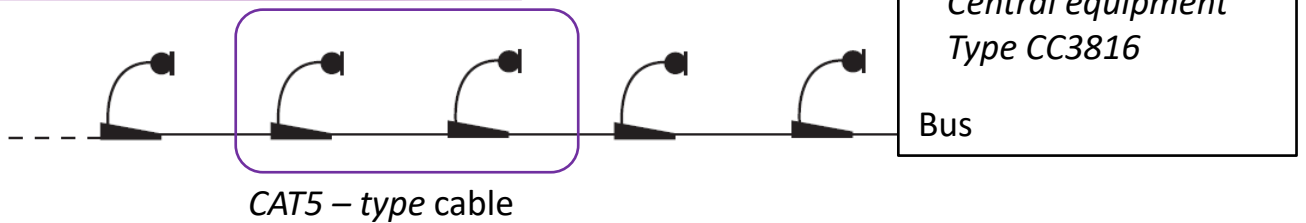

CAT5 - type cable

RJ45-RJ45 right
8 conductors

- 1 bus audio pair
- 1 RS485 pair
- 1 free pair
- 1 x 24Vdc power supply pair

